
KD210 series 232.20 282.30 Type



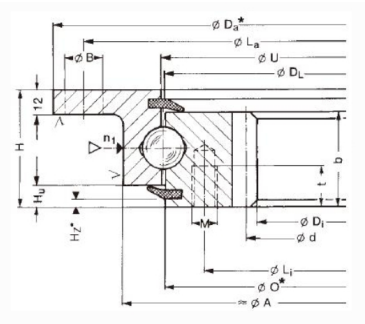

Type	Brand	Weight	Ball Track Diameter	Outside Dia	Inner Dia	Total Height	External Bolt Circle Dia	Internal Bolt Circle Dia	Number Of Bolt Holes Per Hole Circle	Bolt Hole Dia	ni	B/M	t [mm]	Number Of Grease Nipples	Diameter	Diameter	Diameter	Diameter	Distance At Bottom Outer Ring/Inner Ring	Distance At Bottom Outer Ring/Inner Ring	Gear P.C.D.	Module	Number Of Teeth	Tooth Width	K.M	Permissible Tangentialforces, Normal	Permissible tangentialforces, Maximum	Bearing Clearance	
		[KG]	DL [mm]	Da [mm]	Di [mm]	H [mm]	La [mm]	Li [mm]	na	B/M [mm]		[mm]		n1	O[mm]	U[mm]	A [mm]	C [mm]	Hu[mm]	Ho[mm]	d[mm]	M[mm]	Z	b[mm]	[mm]	[kN]	[kN]	Axial [mm]	Radial [mm]
232.20.0400.013 Typ 21/520.2	LYMC	27,1	414	518	326,5	56	490	375	8	18	12	M12	20	4	412	415,5	453	-	l0.5	-	335	5	67	45,5	−0,75	13,54	27,08	0,5	0,5
232.20.0500.013 Typ 21/650.2	LYMC	36,9	544	648	445,2	56	620	505	10	18	16	M12	20	4	542	545,5	583	-	10,5	-	456	6	76	45,5	−0,6	16,00	32,00	0,5	0,5
232.20.0600.013 Typ 21/750.2	LYMC	43,7	644	748	547;2	56	720	605	12	18	18	M12	20	4	642	645,5	683	-	10,5	-	558	6	93	45,5	−0,6	15,62	31,24	0,5	0,5
232.20.0700.013 Typ 21/850.2	LYMC	51,1	744	848	649,2	56	820	705	12	18	20	M12	20	4	742	745,5	783	-	10,5	-	660	6	110	45,5	−0,6	15,32	30,64	0,5	0,5
232.20.0800.013 Typ 21/950.2	LYMC	61,6	844	948	737,6	56	920	805	14	18	20	M12	20	4	842	845,5	883	-	10.5	-	752	8	94	45,5	−0,8	20,00	41,00	0 ,5	0,5
232.20.0900.013 Typ 21/1050.2	LYMC	65,8	944	1048	841,6	56	1020	905	16	18	22	M12	20	4	942	945,5	983	-	10,5	-	856	8	107	45,5	−0,8	20,49	40,98	0,5	0,5
232.20.1000.013 1094 Typ 21/1200.2	LYMC	80,7	1094	1198	985,6	56	1170	1055	16	18	24	M12	20	4	1092	1095,5	1133	-	10,5	-	1000	8	125	45,5	−0,8	20,16	40,32	0,5	0,5
232.21.0475.013 Typ 21/520.2	LYMC	27,1	414	517	326,5	56	490	375	8	18	12	M12	20	4	411 −0, 10	415,5	453	-	10,5	-	335	5	67	45,5	-0,75	13,54	27,08	0 to0,03	0 to0,03
232.21.0575.013 Typ 21/650.2	LYMC	36,9	544	647	445,2	56	620	505	10	18	16	M12	20	4	541 −0,11	545,5	583	-	10,5	-	456	6	76	45,5	-0,6	16,00	32,00	0 to0,03	0 to0,03
232.21.0675.013 Typ 21/750.2	LYMC	43,7	644	747	547,2	56	720	605	12	18	18	M12	20	4	641 −0,13	645,5	683	-	10,5	-	558	6	93	45,5	-0,6	15,62	31,24	0 to0,04	0 to0,04
232.21.0775.013 Typ 21/850.2	LYMC	51,1	744	847	649,2	56	820	705	12	18	20	M12	20	4	741 −0,13	745,5	783	-	10,5	-	660	6	110	45,5	-0,6	15,32	30,64	0 to0,04	0 to0,04
232.21.0875.013 Typ 21/950.2	LYMC	61,6	844	947	737,6	56	920	805	14	18	20	M12	20	4	841 .14	845,5	883	-	10.5	-	752	8	94	45,5	-0,8	20,80	41,60	0 to0,05	0 to0,05
232.21.0975.013 Typ 21/1050.2	LYMC	65,8	944	1047	841,6	56	1020	905	16	18	22	M12	20	4	941 −0,14	945,5	983	-	10,5	-	856	8	107	45,5	-0,8	20,49	40,98	0 to0,05	0 to0,05
232.21.1075.013 Typ 21/1200.2	LYMC	80,7	1094	1197	985,6	56	1170	1055	16	18	24	M12	20	4	1091 .17	1095,5	1133	-	10,5	-	1000	8	125	45,5	-0,8	20,16	40,32	0 to0,06	0 to0,06
232.20.0400.503 Typ 21/520.2	LYMC	26,9	414	518	326,5	56	490	375	16	18	12	M12	20	4	421.5	415,5	453	-	10,5	-	335	5	67	45,5	-0,75	13,54	27,08	0,5	0,5
232.20.0500.503 Typ 21/650.2	LYMC	36,7	544	648	445,2	56	620	505	20	18	16	M12	20	4	542.5	545,5	583	-	10,5	-	456	6	76	45,5	−0,6	16,00	32,00	0,5	0,5
232.20.0600.503 Typ 21/750.2	LYMC	43,4	644	748	547,2	56	720	605	24	18	18	M12	20	4	642.5	645,5	683	-	10,5	-	558	6	93	45,5	−0,6	15,62	31;24	0,5	0,5
2:S-2.20.0700.503 Typ 21/850.2	LYMC	50,8	744	848	649,2	56	820	705	24	18	20	M12	20	4	742.5	745,5	783	-	10,5	-	660	6	110	45,5	−0,6	15,32	30,64	0,5	0,5
232.20.0800.503 Typ 21/950.2	LYMC	61,3	844	948	737,6	56	920	805	28	18	20	M12	20	4	842.5	845,5	883	-	10,5	-	752	8	94	45,5	-0,.8	20,80	41,60	0,5	0,5
232.20.0900.503 Typ 21/1050.2	LYMC	65,4	944	1048	841,6	56	1020	905	32	18	22	M12	20	4	942.5	945,5	983	-	10,5	-	856	8	107	45,5	−0,8	20,49	40,98	0,5	0,5
232.20.1000.503.1094 Typ 21/1200.2	LYMC	80,3	1094	1198	985,6	56	170	1055	32	18	24	M12	20	4	1092.5	1095,5	1133	-	10,5	-	1000	8	125	45,5	−0,8	20,16	40,32	0,5	0,5

LYMC BEARING