

KD210 Series 230 280 Type



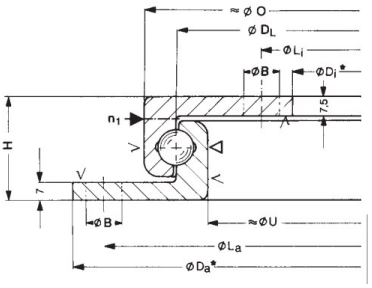

Type	Brand	Weight	Ball Track Diameter	Outside Dia	Inner Dia	Total Height	External Bolt Circle Dia	Internal Bolt Circle Dia	Number Of Bolt Holes Per Hole Circle	Bolt Hole Dia	ni	B/M	Number Of Grease Nipples	Diameter	Diameter	Diameter	Diameter	Distance At Bottom Outer Ring/Inner Ring	Distance At Bottom Outer Ring/Inner Ring	Bearing Clearance	
		[KG]	DL [mm]	Da [mm]	Di [mm]	H [mm]	La [mm]	Li [mm]	na	B/M [mm]		[mm]	n1	O[mm]	U[mm]	A [mm]	C [mm]	Hu[mm]	Ho[mm]	Axial [mm]	Radial [mm]
250.14.0300.013 Typ 13/400	LYMC	9,6	323	401	233	40	380	260	8	14	8	14	4	348	298					0,5	0,5
250.1 4.0 400.013 Typ 13/500	LYMC	13,1	421	501	333	40	480	360	8	14	8	14	4	446	396					0,5	0,5
250.15.0300.013 Typ 13/400	LYMC	9,6	323	401	233	40	380	260	8	14	8	14	4	348	298					0,5	0,5
250.15.0400.013 Typ 13/500	LYMC	13,1	421	501	333	40	480	360	8	14	8	14	4	446	396					0,5	0,5
230.20.0400.013 Typ 21 /520.0	LYMC	23,4	414	518	304	56	490	332	8	18	12	18	4	412,5	415,5	453	375	10,5	10,5	0,5	0,5
230 .20.0500.013 Typ 21 /650.0	LYMC	31,0	544	648	434	56	620	462	10	18	14	18	4	542,5	545,5	583	505	10,5	10,5	0,5	0,5
230 .20.0600 .013 Typ 21 /750.0	LYMC	36,4	644	748	534	56	720	562	12	18	16	18	4	642,5	645,5	683	605	10,5	10,5	0,5	o,s
230.20.0700.013 Typ 21 /850.0	LYMC	42,8	744	848	634	56	820	662	12	18	16	18	4	742,5	745,5	783	705	10,5	10,5	0,5	0,5
230 .20.0800.013 Typ 21 /950.0	LYMC	47,8	844	948	734	56	920	762	14	18	18	18	4	842,5	845,5	883	805	10,5	10,5	0,5	0,5
230 .20.0900 .013 Typ 21/1050.0	LYMC	53,1	944	1048	834	56	1020	862	16	18	20	18	4	942,5	945,5	983	905	10,5	10,5	0,5	0,5
230.20.1000.013 Typ 21/1200.0	LYMC	61,9	1094	1198	984	56	1170	1012	16	18	20	18	4	1092,5	1095,5	1133	1055	10,5	10,5	0,5	0,5
230.20.0400.503 Typ 21/520.0	LYMC	23,0	414	518	304	56	490	332	16	18	24	18	4	412,5	415,5	453	375	10,5	10,5	0,5	0,5
230.20.0500.503 Typ 21/650.0	LYMC	30,4	544	648	434	56	620	462	20	18	28	18	4	542,5	545,5	583	505	10,5	10,5	0,5	0,5
230.20.0600.503 Typ 21/750.0	LYMC	35,8	644	748	534	56	720	562	24	18	32	18	4	642,5	645,5	683	605	10,5	10,5	0,5	o,s
230.20.0700.503 Typ 21/850.0	LYMC	42,2	744	848	634	56	820	662	24	18	32	18	4	742,5	745,5	783	705	10,5	10,5	0,5	0,5
230.20.0800.503 Typ 21/950.0	LYMC	47,1	844	948	734	56	920	762	28	18	36	18	4	842,5	845,5	883	805	10,5	10,5	0,5	0,5
230.20.0900.503 Typ 21/1050.0	LYMC	52,3	944	1048	834	56	1020	862	32	18	40	18	4	942,5	945,5	983	905	10,5	10,5	0,5	0,5
230.20.1000.503 Typ 21/1200.0	LYMC	61,1	1094	1198	984	56	1170	1012	32	18	40	18	4	1092,5	1095,5	1133	1055	10,5	10,5	0,5	0,5
230.21.0475.013 Typ 21/520.0	LYMC	23,4	414	517 -0,11	305 +0,08	56	490	332	8	18	12	18	4	412,5	415,5	453	375	10,5	10,5	0 to0,03	0 to0,03
230.21.0575.013 Typ 21/650.0	LYMC	31,0	544	647 --0,13	435 +0,10	56	620	462	10	18	14	18	4	542,5	545,5	583	505	10,5	10,5	0 to0,03	0 to0,03
230.21.0675.013 Typ 21 /7 50.0	LYMC	36,4	644	747 -0,13	535 +0,11	56	720	562	12	18	16	18	4	642,5	645,5	683	605	10,5	10,5	0 to0,04	0 to0,04
230.21.0775.013 Typ 21/850.0	LYMC	42,8	744	847 -0,14	635 +0,13	56	820	662	12	18	16	18	4	742,5	745,5	783	705	10,5	10,5	0 to0,04	0 to0,04
230.21.0875.013 Typ 21/950.0	LYMC	47,8	844	947 -0□14	735 + 0,13	56	920	762	14	18	18	18	4	842,5	845,5	883	805	10,5	10,5	0 to0,05	0 to0,05
230.21.0975.013 Typ 21/1050.0	LYMC	53,1	944	1047 -0,17	835 +0,14	56	1020	862	16	18	20	18	4	942,5	945,5	983	905	10,5	10,5	0 to0,05	0 to0,05
230.21.1075.013 Typ 21/1200.0	LYMC	61,9	1094	1197 -0,17	985 +0,14	56	1170	1012	16	18	20	18	4	1092,5	1095,5	1133	1055	10,5	10,5	0 to0,06	0 to0,06